

AHSC-D Series

Features

- Utilizing a miniaturized winding structure.
- These products provide low DC resistance and high current.
- Precision inductance tolerance is available.


Applications

- Personal computer, Hard disk drives.
- xDSL modem and Cable modem.
- Digital camera and other electronic equipment.

Test Conditions

- L,Q : Agilent/HP E4991A+ Agilent/HP16197A.
- SRF : Agilent/HP E4991A+ Agilent/HP 16197A.
- Rdc : DIGITAL MILLIOHM METER Chroma 16502 or equivalent.
- Irms : DC current(A) that will cause an approximate ΔT of 40°C.
- Operating temperature range from -40°C to 125°C (Including self - temperature rise).

External dimensions (Unit:m/m)

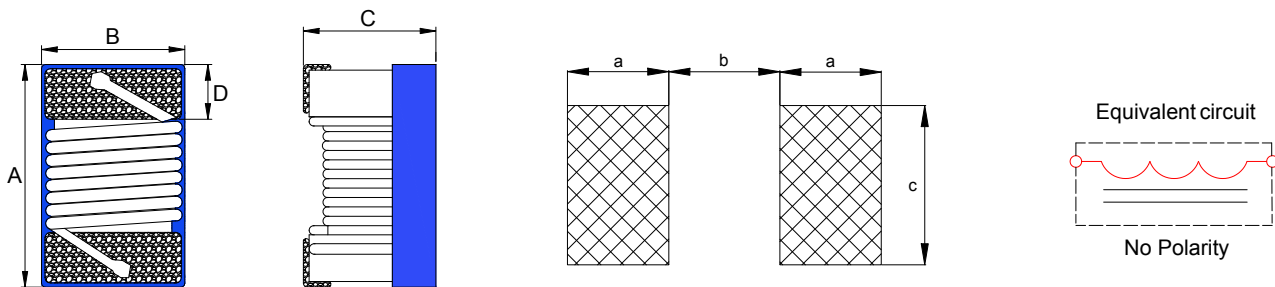

TYPE	METRIC	A	B	C	D Typ.	a Typ.	b Typ.	c Typ.	Q'Ty / Reel
AHSC100505	0402	1.19Max	0.70Max	0.66Max	0.23	0.36	0.46	0.66	10000
AHSC160808	0603	1.80Max	1.20Max	1.02Max	0.33	0.64	0.64	1.02	4000
AHSC201212	0805	2.40Max	1.73Max	1.52Max	0.44	1.02	0.76	1.78	2000
AHSC292520	1008	2.92Max	2.79Max	2.23Max	0.50	1.02	1.27	2.54	2000
AHSC362924	1210	3.60Max	2.90Max	2.40Max	0.50	1.02	1.78	2.54	2000

Part Number Code

AHSC 201212 □ 1R0 D
 A B C D E

A: Series Name Wire Wound Inductors
 B: Dimensions(mm) 201212: 2.4×1.73×1.52 Max
 C: Tolerance G: ±2% J: ±5% K: ±10% M: 20%
 D: Inductance 1R0=1.0uH
 E: Internal Control

AHSC-D Series

Part Number	Inductance (nH)	Test Freq. (MHz)	Q/MHz Min.	S R F (MHz)Min.	R D C (Ω)Max.	Irms (mA)Max.
AHSC100505□1N0D	1.0	250	10/250	12900	0.045	1360
AHSC100505□1N2D	1.2	250	8/250	12900	0.150	900
AHSC100505□1N3D	1.3	250	8/250	12900	0.150	800
AHSC100505□1N5D	1.5	250	8/250	12900	0.150	800
AHSC100505□1N8D	1.8	250	20/250	12000	0.070	1040
AHSC100505□1N9D	1.9	250	20/250	11300	0.070	1040
AHSC100505□2N0D	2.0	250	23/250	11100	0.090	1040
AHSC100505□2N2D	2.2	250	22/250	10800	0.090	960
AHSC100505□2N4D	2.4	250	22/250	10500	0.090	790
AHSC100505□2N7D	2.7	250	12/250	10400	0.170	200
AHSC100505□3N0D	3.0	250	24/250	7000	0.076	840
AHSC100505□3N3D	3.3	250	24/250	7000	0.076	840
AHSC100505□3N6D	3.6	250	24/250	6800	0.076	840
AHSC100505□3N9D	3.9	250	24/250	6000	0.076	840
AHSC100505□4N1D	4.1	250	22/250	6000	0.091	700
AHSC100505□4N3D	4.3	250	22/250	6000	0.091	700
AHSC100505□4N7D	4.7	250	20/250	4770	0.130	640
AHSC100505□5N1D	5.1	250	23/250	4800	0.110	800
AHSC100505□5N6D	5.6	250	25/250	4800	0.110	760
AHSC100505□5N8D	5.8	250	25/250	4800	0.110	760
AHSC100505□6N2D	6.2	250	25/250	4800	0.110	760
AHSC100505□6N8D	6.8	250	24/250	4800	0.120	680
AHSC100505□7N2D	7.2	250	25/250	4800	0.120	680
AHSC100505□7N3D	7.3	250	25/250	4800	0.120	680
AHSC100505□7N5D	7.5	250	25/250	4800	0.150	680
AHSC100505□8N2D	8.2	250	25/250	4400	0.150	680
AHSC100505□8N7D	8.7	250	25/250	4100	0.200	480
AHSC100505□9N0D	9.0	250	25/250	4160	0.150	680
AHSC100505□9N1D	9.1	250	25/250	4160	0.150	680
AHSC100505□9N5D	9.5	250	24/250	4000	0.200	480
AHSC100505□10ND	10	250	24/250	3900	0.200	480
AHSC100505□11ND	11	250	26/250	3680	0.120	640
AHSC100505□12ND	12	250	26/250	3600	0.120	640
AHSC100505□13ND	13	250	24/250	3450	0.210	440
AHSC100505□15ND	15	250	26/250	3280	0.170	560
AHSC100505□16ND	16	250	25/250	3100	0.250	560
AHSC100505□18ND	18	250	25/250	3100	0.230	420
AHSC100505□19ND	19	250	26/250	3040	0.240	480
AHSC100505□20ND	20	250	26/250	3000	0.250	420
AHSC100505□22ND	22	250	25/250	2800	0.300	400
AHSC100505□23ND	23	250	25/250	2720	0.300	400
AHSC100505□24ND	24	250	25/250	2700	0.350	400

AHSC-D Series

Part Number	Inductance (nH)	Test Freq. (MHz)	Q/MHz Min.	S R F (MHz)Min.	R D C (Ω)Max.	Irms (mA)Max.
AHSC100505□27ND	27	250	25/250	2480	0.30	400
AHSC100505□30ND	30	250	25/250	2350	0.40	400
AHSC100505□33ND	33	250	24/250	2350	0.40	400
AHSC100505□36ND	36	250	25/250	2320	0.50	320
AHSC100505□39ND	39	250	25/250	2100	0.55	200
AHSC100505□40ND	40	250	24/250	2240	0.65	320
AHSC100505□43ND	43	250	25/250	2030	0.81	100
AHSC100505□47ND	47	250	25/250	2100	0.83	150
AHSC100505□51ND	51	250	25/250	1750	0.92	100
AHSC100505□56ND	56	250	25/250	1760	0.97	100
AHSC100505□62ND	62	250	25/250	1620	1.40	100
AHSC100505□68ND	68	250	25/250	1620	1.50	100
AHSC100505□72ND	72	250	25/250	1260	1.70	50
AHSC100505□75ND	75	250	25/250	1260	1.75	50
AHSC100505□77ND	77	250	25/250	1260	1.75	50
AHSC100505□82ND	82	250	25/250	1260	1.80	50
AHSC100505□91ND	91	250	24/250	1160	2.20	30
AHSC100505□R10D	100	250	24/250	1160	2.50	30
AHSC100505□R11D	110	250	24/250	1150	2.60	30
AHSC100505□R12D	120	250	24/250	1100	2.20	30
AHSC160808□1N5D	1.5	250	24/250	12500	0.03	700
AHSC160808□1N6D	1.6	250	24/250	12500	0.03	700
AHSC160808□1N8D	1.8	250	16/250	12500	0.045	700
AHSC160808□2N0D	2.0	250	12/250	12500	0.25	100
AHSC160808□2N2D	2.2	100	12/100	12500	0.25	100
AHSC160808□2N7D	2.7	250	22/250	5900	0.045	700
AHSC160808□3N3D	3.3	250	22/250	5900	0.045	700
AHSC160808□3N6D	3.6	250	22/250	5900	0.063	700
AHSC160808□3N9D	3.9	250	22/250	6900	0.08	700
AHSC160808□4N3D	4.3	250	22/250	5900	0.063	700
AHSC160808□4N7D	4.7	250	20/250	5800	0.116	700
AHSC160808□5N1D	5.1	250	20/250	5700	0.14	700
AHSC160808□5N6D	5.6	250	26/250	4760	0.075	700
AHSC160808□6N2D	6.2	250	20/250	5700	0.14	700
AHSC160808□6N3D	6.3	250	20/250	5700	0.14	700
AHSC160808□6N8D	6.8	250	27/250	5800	0.11	700
AHSC160808□7N5D	7.5	250	28/250	4800	0.106	700
AHSC160808□8N0D	8.0	250	28/250	4700	0.109	700
AHSC160808□8N2D	8.2	250	30/250	4200	0.115	700
AHSC160808□8N7D	8.7	250	28/250	4600	0.109	700
AHSC160808□9N1D	9.1	250	28/250	5400	0.125	700
AHSC160808□9N5D	9.5	250	28/250	5400	0.125	700

AHSC-D Series

Part Number	Inductance (nH)	Test Freq. (MHz)	Q/MHz Min.	S R F (MHz)Min.	R D C (Ω)Max.	I _{rms} (mA)Max.
AHSC160808□10ND	10	250	31/250	4800	0.13	700
AHSC160808□11ND	11	250	30/250	4000	0.13	700
AHSC160808□12ND	12	250	35/250	4000	0.13	700
AHSC160808□13ND	13	250	35/250	4000	0.13	700
AHSC160808□15ND	15	250	35/250	4000	0.17	700
AHSC160808□16ND	16	250	34/250	3300	0.17	700
AHSC160808□18ND	18	250	35/250	3100	0.17	700
AHSC160808□20ND	20	250	36/250	3000	0.18	700
AHSC160808□22ND	22	250	38/250	3000	0.19	700
AHSC160808□23ND	23	250	38/250	3000	0.19	700
AHSC160808□24ND	24	250	36/250	2650	0.135	700
AHSC160808□27ND	27	250	40/250	2800	0.22	600
AHSC160808□30ND	30	250	37/250	2250	0.22	600
AHSC160808□33ND	33	250	40/250	2300	0.22	600
AHSC160808□36ND	36	250	37/250	2080	0.25	600
AHSC160808□39ND	39	250	40/250	2200	0.25	600
AHSC160808□43ND	43	250	38/250	2000	0.28	600
AHSC160808□47ND	47	200	38/200	2000	0.28	600
AHSC160808□51ND	51	200	35/200	1900	0.27	600
AHSC160808□56ND	56	200	38/200	1900	0.31	600
AHSC160808□60ND	60	200	37/200	1800	0.33	600
AHSC160808□62ND	62	200	37/200	1800	0.33	600
AHSC160808□68ND	68	200	37/200	1700	0.34	600
AHSC160808□72ND	72	150	34/150	1700	0.49	400
AHSC160808□75ND	75	150	28/150	1700	0.52	400
AHSC160808□82ND	82	150	34/150	1700	0.54	400
AHSC160808□85ND	85	150	34/150	1700	0.58	400
AHSC160808□90ND	90	150	28/150	1600	0.58	400
AHSC160808□91ND	91	150	28/150	1600	0.58	400
AHSC160808□R10D	100	150	34/150	1400	0.58	400
AHSC160808□R11D	110	150	32/150	1350	0.61	300
AHSC160808□R12D	120	150	32/150	1300	0.65	300
AHSC160808□R13D	130	150	32/150	1150	0.92	290
AHSC160808□R15D	150	150	28/150	990	0.92	280
AHSC160808□R16D	160	150	28/150	990	1.25	280
AHSC160808□R18D	180	100	25/100	990	1.25	240
AHSC160808□R20D	200	100	25/100	900	1.98	200
AHSC160808□R22D	220	100	25/100	900	2.10	200
AHSC160808□R24D	240	100	25/100	900	2.20	200
AHSC160808□R25D	250	100	25/100	882	2.55	120
AHSC160808□R27D	270	100	26/100	830	2.16	170
AHSC160808□R29D	290	100	25/100	800	3.20	100

AHSC-D Series

Part Number	Inductance (nH)	Test Freq. (MHz)	Q/MHz Min.	S R F (MHz)Min.	R D C (Ω)Max.	Irms (mA)Max.
AHSC160808□R30D	300	100	25/100	790	2.50	100
AHSC160808□R33D	330	100	25/100	790	3.89	100
AHSC160808□R39D	390	100	25/100	780	4.35	100
AHSC160808□R47D	470	100	25/100	700	4.50	100
AHSC160808□R56D	560	100	23/100	460	5.00	90
AHSC201212□2N2D	2.2	250	50/1000	7900	0.06	800
AHSC201212□2N7D	2.7	250	50/1000	7900	0.06	800
AHSC201212□2N8D	2.8	250	40/1500	7900	0.06	800
AHSC201212□2N9D	2.9	250	40/1500	7900	0.06	800
AHSC201212□3N0D	3.0	250	40/1500	7900	0.06	800
AHSC201212□3N3D	3.3	250	40/1500	7900	0.08	600
AHSC201212□3N6D	3.6	250	20/1000	7900	0.10	200
AHSC201212□3N9D	3.9	250	20/1000	7900	0.11	150
AHSC201212□4N7D	4.7	250	35/1000	6200	0.08	600
AHSC201212□5N1D	5.1	250	50/1000	6200	0.08	600
AHSC201212□5N6D	5.6	250	65/1000	5900	0.08	600
AHSC201212□6N2D	6.2	250	65/1000	5900	0.08	600
AHSC201212□6N8D	6.8	250	50/1000	5600	0.11	600
AHSC201212□7N5D	7.5	250	50/1000	4800	0.14	600
AHSC201212□8N2D	8.2	250	50/1000	4400	0.12	600
AHSC201212□9N1D	9.1	250	60/500	4300	0.10	600
AHSC201212□10ND	10	250	60/500	4300	0.10	600
AHSC201212□12ND	12	250	50/500	4000	0.15	600
AHSC201212□15ND	15	250	50/500	3200	0.17	600
AHSC201212□16ND	16	250	50/500	3200	0.17	600
AHSC201212□18ND	18	250	50/500	3100	0.2	600
AHSC201212□20ND	20	250	55/500	2600	0.22	500
AHSC201212□22ND	22	250	55/500	2600	0.22	500
AHSC201212□23ND	23	250	50/500	2400	0.22	500
AHSC201212□24ND	24	250	50/500	2400	0.22	500
AHSC201212□25ND	25	250	50/500	2450	0.22	500
AHSC201212□27ND	27	250	55/500	2580	0.25	500
AHSC201212□30ND	30	250	55/500	2400	0.25	500
AHSC201212□33ND	33	250	60/500	2150	0.27	500
AHSC201212□36ND	36	250	55/500	1900	0.27	500
AHSC201212□39ND	39	250	60/500	1850	0.29	500
AHSC201212□43ND	43	200	60/500	1800	0.34	500
AHSC201212□47ND	47	200	60/500	1700	0.31	500
AHSC201212□50ND	50	200	60/500	1650	0.34	500
AHSC201212□56ND	56	200	60/500	1600	0.34	500
AHSC201212□62ND	62	200	60/500	1450	0.36	500
AHSC201212□64ND	64	200	60/500	1500	0.38	500

AHSC-D Series

Part Number	Inductance (nH)	Test Freq. (MHz)	Q/MHz Min.	S R F (MHz)Min.	R D C (Ω)Max.	Irms (mA)Max.
AHSC201212□66ND	66	200	60/500	1500	0.38	500
AHSC201212□68ND	68	200	60/500	1500	0.38	500
AHSC201212□75ND	75	150	60/500	1400	0.40	450
AHSC201212□78ND	78	150	60/500	1400	0.40	450
AHSC201212□82ND	82	150	65/500	1330	0.42	400
AHSC201212□91ND	91	150	65/500	1330	0.48	400
AHSC201212□92ND	92	150	65/500	1330	0.48	400
AHSC201212□R10D	100	150	65/500	1250	0.46	400
AHSC201212□R11D	110	150	50/250	1100	0.48	400
AHSC201212□R12D	120	150	50/250	1100	0.51	400
AHSC201212□R14D	140	100	50/250	920	0.56	400
AHSC201212□R15D	150	100	50/250	920	0.56	400
AHSC201212□R16D	160	100	50/250	920	0.60	400
AHSC201212□R18D	180	100	50/250	920	0.64	400
AHSC201212□R20D	200	100	50/250	860	0.68	400
AHSC201212□R22D	220	100	50/250	820	0.70	400
AHSC201212□R24D	240	100	44/250	770	1.00	350
AHSC201212□R25D	250	100	45/250	750	1.20	350
AHSC201212□R27D	270	100	48/250	730	1.00	350
AHSC201212□R28D	280	100	48/250	550	1.35	350
AHSC201212□R29D	290	150	48/250	450	1.40	310
AHSC201212□R30D	300	150	48/250	450	1.40	310
AHSC201212□R33D	330	100	48/250	650	1.40	310
AHSC201212□R36D	360	100	48/250	630	1.45	300
AHSC201212□R39D	390	100	48/250	600	1.50	290
AHSC201212□R42D	420	50	33/100	425	1.70	250
AHSC201212□R43D	430	50	33/100	425	1.70	250
AHSC201212□R47D	470	50	33/100	375	1.76	250
AHSC201212□R56D	560	25	23/50	330	1.90	230
AHSC201212□R62D	620	25	23/50	320	2.20	210
AHSC201212□R68D	680	25	23/50	310	2.20	190
AHSC201212□R75D	750	25	23/50	310	2.30	180
AHSC201212□R82D	820	25	23/50	310	2.35	180
AHSC201212□R88D	880	25	23/50	310	2.35	180
AHSC201212□R91D	910	25	22/50	250	2.45	170
AHSC201212□1R0D	1000	25	20/50	220	2.50	170
AHSC201212□1R2D	1200	25	20/25	180	2.90	150
AHSC201212□1R5D	1500	25	20/25	160	3.30	150
AHSC201212□1R6D	1600	25	20/25	140	3.40	150
AHSC201212□1R8D	1800	25	20/25	130	3.50	120
AHSC201212□2R2D	2200	25	20/25	100	4.50	120
AHSC201212□2R7D	2700	25	18/25	80	4.80	100

AHSC-D Series

Part Number	Inductance (nH)	Test Freq. (MHz)	Q/MHz Min.	S R F (MHz)Min.	R D C (Ω)Max.	Irms (mA)Max.
AHSC201212□3R0D	3000	25	18/25	60	5.00	60
AHSC201212□3R3D	3300	25	18/25	50	6.80	50
AHSC201212□4R7D	4700	25	18/25	40	7.00	30
AHSC292520□3N9D	3.9	50	50/500	4100	0.08	1000
AHSC292520□4N7D	4.7	50	50/500	4100	0.08	1000
AHSC292520□5N6D	5.6	50	30/500	4100	0.20	650
AHSC292520□6N2D	6.2	50	20/500	4100	0.20	400
AHSC292520□10ND	10	50	50/500	4100	0.08	1000
AHSC292520□12ND	12	50	50/500	3300	0.09	1000
AHSC292520□15ND	15	50	50/500	2500	0.10	1000
AHSC292520□18ND	18	50	50/350	2500	0.11	1000
AHSC292520□22ND	22	50	55/350	2400	0.12	1000
AHSC292520□24ND	24	50	55/350	1600	0.13	1000
AHSC292520□27ND	27	50	55/350	1600	0.13	1000
AHSC292520□33ND	33	50	60/350	1600	0.14	1000
AHSC292520□36ND	36	50	60/350	1500	0.15	1000
AHSC292520□39ND	39	50	60/350	1500	0.15	1000
AHSC292520□47ND	47	50	65/350	1500	0.16	1000
AHSC292520□51ND	51	50	65/350	1300	0.18	1000
AHSC292520□54ND	54	50	65/350	1300	0.18	1000
AHSC292520□56ND	56	50	65/350	1300	0.18	1000
AHSC292520□65ND	65	50	65/350	1300	0.20	1000
AHSC292520□68ND	68	50	65/350	1300	0.20	1000
AHSC292520□75ND	75	50	60/350	1000	0.22	1000
AHSC292520□82ND	82	50	60/350	1000	0.22	1000
AHSC292520□R10D	100	25	60/350	1000	0.56	650
AHSC292520□R11D	110	25	60/350	950	0.63	650
AHSC292520□R12D	120	25	60/350	950	0.63	650
AHSC292520□R15D	150	25	45/100	850	0.70	580
AHSC292520□R18D	180	25	45/100	750	0.77	620
AHSC292520□R20D	200	25	45/100	700	0.84	500
AHSC292520□R21D	210	25	45/100	700	0.84	500
AHSC292520□R22D	220	25	45/100	700	0.84	500
AHSC292520□R24D	240	25	45/100	700	0.84	500
AHSC292520□R26D	260	25	45/100	600	0.91	500
AHSC292520□R27D	270	25	45/100	600	0.91	500
AHSC292520□R29D	290	25	45/100	570	1.05	450
AHSC292520□R30D	300	25	45/100	570	1.05	450
AHSC292520□R33D	330	25	45/100	570	1.05	450
AHSC292520□R35D	350	25	45/100	500	1.12	470
AHSC292520□R36D	360	25	45/100	500	1.12	470
AHSC292520□R39D	390	25	45/100	500	1.12	470
AHSC292520□R43D	430	25	45/100	450	1.19	470

AHSC-D Series

Part Number	Inductance (nH)	Test Freq. (MHz)	Q/MHz Min.	S R F (MHz)Min.	R D C (Ω)Max.	I _{rms} (mA)Max.
AHSC292520□R47D	470	25	45/100	450	1.19	470
AHSC292520□R51D	510	25	45/100	415	1.33	400
AHSC292520□R54D	540	25	45/100	415	1.33	400
AHSC292520□R56D	560	25	45/100	415	1.33	400
AHSC292520□R62D	620	25	45/100	375	1.40	300
AHSC292520□R64D	640	25	45/100	375	1.40	300
AHSC292520□R66D	660	25	45/100	375	1.47	400
AHSC292520□R68D	680	25	45/100	375	1.47	400
AHSC292520□R75D	750	25	45/100	360	1.54	360
AHSC292520□R82D	820	25	45/100	350	1.61	400
AHSC292520□R88D	880	25	35/50	320	1.68	380
AHSC292520□R91D	910	25	35/50	320	1.68	380
AHSC292520□1R0D	1000	25	35/50	290	1.75	370
AHSC292520□1R2D	1200	7.9	35/50	250	2.00	310
AHSC292520□1R5D	1500	7.9	28/50	200	2.30	330
AHSC292520□1R6D	1600	7.9	28/50	200	2.30	330
AHSC292520□1R8D	1800	7.9	28/50	160	2.60	300
AHSC292520□2R0D	2000	7.9	28/50	160	2.80	280
AHSC292520□2R2D	2200	7.9	28/50	160	2.80	280
AHSC292520□2R7D	2700	7.9	22/25	140	3.20	290
AHSC292520□3R3D	3300	7.9	22/25	110	3.40	290
AHSC292520□3R9D	3900	7.9	20/25	100	3.60	260
AHSC292520□4R7D	4700	7.9	20/7.9	60	4.00	260
AHSC292520□5R6D	5600	7.9	16/7.9	20	5.70	240
AHSC292520□6R8D	6800	7.9	18/7.9	40	7.70	200
AHSC292520□8R2D	8200	7.9	18/7.9	25	10.70	170
AHSC292520□100D	10000	7.9	18/7.9	25	12.70	100
AHSC362924□10ND	10	100	40/300	4000	0.08	1000
AHSC362924□12ND	12	100	40/300	3200	0.08	1000
AHSC362924□15ND	15	100	40/300	3200	0.20	1000
AHSC362924□18ND	18	100	50/300	2800	0.10	1000
AHSC362924□22ND	22	100	50/300	2200	0.10	1000
AHSC362924□27ND	27	100	50/300	1800	0.11	1000
AHSC362924□33ND	33	100	55/300	1800	0.11	1000
AHSC362924□39ND	39	100	55/300	1500	0.12	1000
AHSC362924□43ND	43	100	55/300	1500	0.12	1000
AHSC362924□47ND	47	100	55/300	1500	0.13	1000
AHSC362924□56ND	56	100	55/300	1450	0.14	1000
AHSC362924□68ND	68	100	55/300	1200	0.15	900
AHSC362924□82ND	82	100	55/300	1000	0.20	900
AHSC362924□91ND	91	100	60/300	1100	0.20	1000
AHSC362924□R10D	100	100	55/300	900	0.20	850
AHSC362924□R12D	120	100	60/300	800	0.25	800

AHSC-D Series

Part Number	Inductance (nH)	Test Freq. (MHz)	Q/MHz Min.	S R F (MHz)Min.	R D C (Ω)Max.	Irms (mA)Max.
AHSC362924□R15D	150	100	60/300	700	0.30	750
AHSC362924□R18D	180	50	60/300	650	0.30	700
AHSC362924□R22D	220	50	60/300	650	0.40	770
AHSC362924□R24D	240	50	40/300	580	0.40	630
AHSC362924□R27D	270	50	40/300	580	0.40	630
AHSC362924□R33D	330	50	45/150	580	0.58	590
AHSC362924□R36D	360	50	45/150	510	0.58	530
AHSC362924□R39D	390	50	45/150	510	0.58	530
AHSC362924□R47D	470	50	45/150	480	1.00	490
AHSC362924□R56D	560	25	45/150	420	1.10	460
AHSC362924□R68D	680	25	45/150	400	1.20	430
AHSC362924□R82D	820	35	45/150	370	2.00	400
AHSC362924□1R0D	1000	25	45/150	340	1.85	320
AHSC362924□1R2D	1200	25	45/150	220	2.30	300
AHSC362924□1R5D	1500	7.9	20/50	160	2.70	310
AHSC362924□1R8D	1800	7.9	30/50	160	3.50	310
AHSC362924□2R2D	2200	7.9	25/50	130	2.41	310
AHSC362924□2R7D	2700	7.9	25/50	110	3.50	300
AHSC362924□3R0D	3000	7.9	20/25	110	3.50	300
AHSC362924□3R3D	3300	7.9	20/25	60	3.60	290
AHSC362924□3R9D	3900	7.9	20/25	60	4.00	290
AHSC362924□4R7D	4700	7.9	20/25	60	5.00	280
AHSC362924□5R2D	5200	7.9	15/25	50	6.00	250
AHSC362924□5R6D	5600	7.9	15/25	50	6.00	250
AHSC362924□6R8D	6800	7.9	15/7.9	40	9.00	230
AHSC362924□7R5D	7500	7.9	20/7.9	50	9.50	170
AHSC362924□8R2D	8200	7.9	20/7.9	50	9.50	170
AHSC362924□8R6D	8600	7.9	15/7.9	40	9.00	200
AHSC362924□100D	10000	7.9	15/7.9	30	10.00	150